




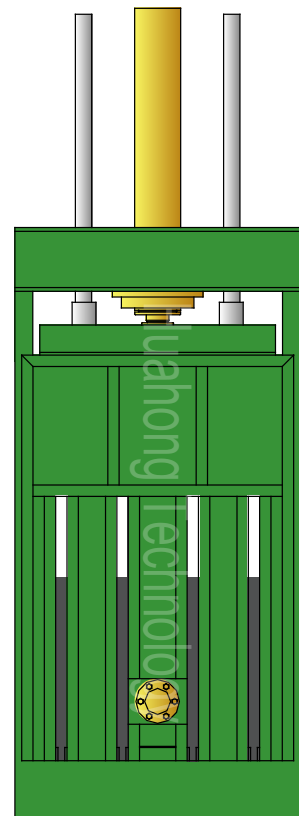

Y82T-63F

Plan View

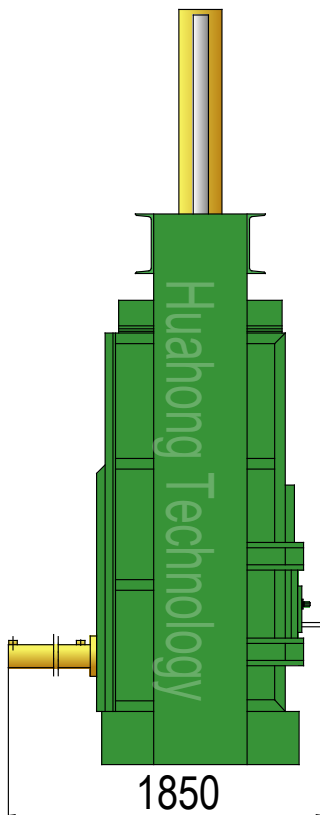

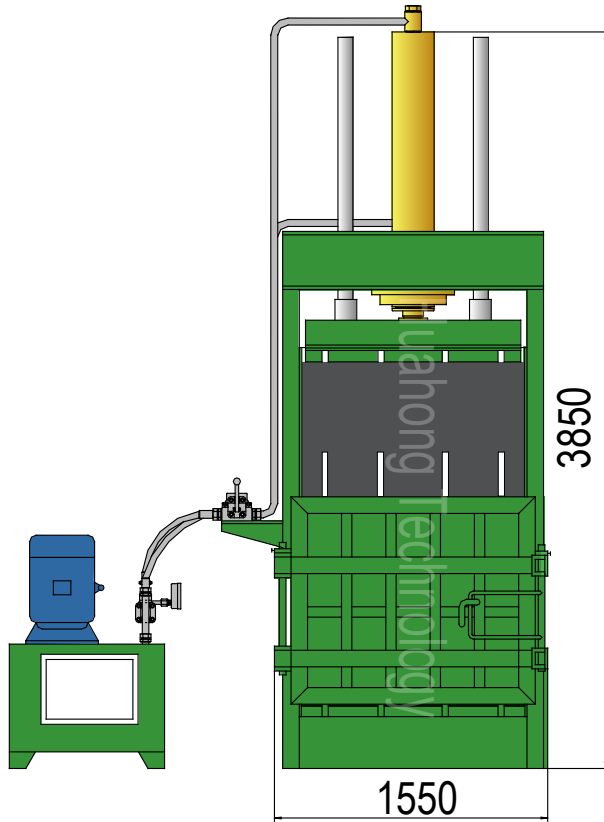

Y82T-63F

Technical parameters

Vertical Paper / Cardboard / Plastic Baler

Model: Y82T-63F

Power System (Motor)

Type: Y180L-6
 Rated Power: 15 kW
 Rated Speed: 970 rpm
 Power Spec: 3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force: 63 Ton
 Ejection Cyl. Force: 10 Ton
 Hydraulic System Pressure: 20 MPa

Hydraulic System (Pump)

Type: 63YCY14-1B
 Rated Displacement: 63 ml/r
 Max Operating Pressure: 31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders.

Operation System

Manual Valve Operation

General Description

Main Machine Size (L×W×H): 1550×1850×3850 mm
 Press Box Size (L×W×H): 1100×800×1500 mm
 Space Between Ram & Bottom: Max. 1500 mm; Min. 300 mm
 Bale Size (L×W): 1100×800 mm
 Bale Weight (Cardboard): 200-300 kg
 Production Rate (Cardboard): 600-1000 kg/hr
 Strapping: Tempered Iron Wire, φ2.8/3.2mm, 4 Lines, Manual Strapping.
 Bale Discharging: By Ejection Cylinder
 Shipping Weight: Approx. 3.5 tons
 Loading (Standard Containers): 1/2×20'GP

Hydraulic Oil Brand

Oil Tank Volume: 320 ltr

ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.